



Technical Data

Split Case Pump - 250GQS-65

Revision no.

Page:

1

Receiver

From

Company name

Respons. Department

Person in charge

Phone number

Fax no


E-mail address


Brand: Gol Pumps
Model: 250GQS-65

Features:

- **Double Suction Pump:** Large Volume High Pressure Water Pump.
- **Bearing:** First Level SKF.
- **Shaft Seal:** Bergman SiC SS316 NBR machine seal, easy to use and long use life.
- **Motor Selection:** Can be match with different brand motors.
- **Quality Traceability:** With Materials MTC and related GQC&QA record.

Dimensions (mm):

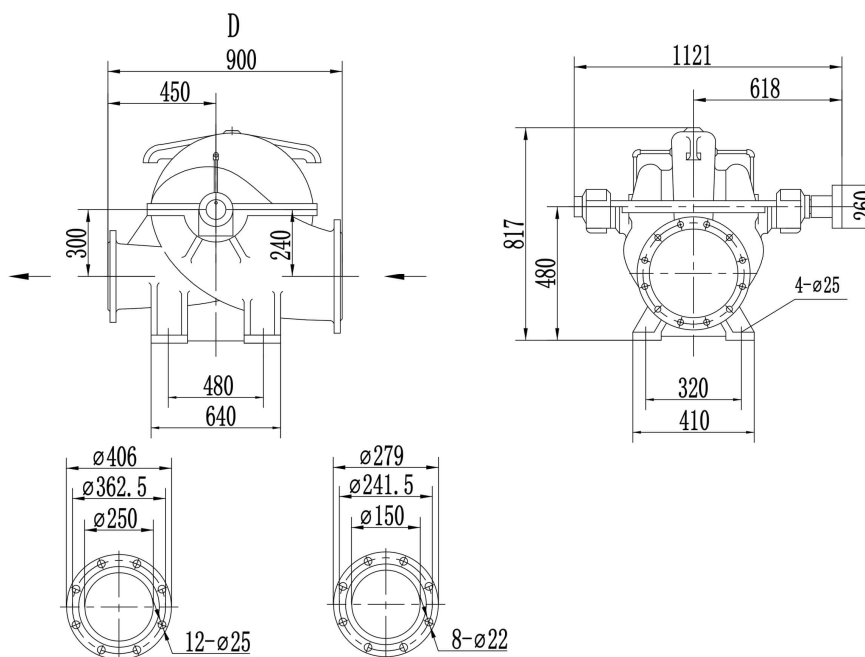

Inlet (ANSI 125 flange)		Outlet (ANSI 125 flange)		Impeller Diameter
mm	In.	mm	In.	In.
250	10	150	6	17.7

Project

Project ID

Created by

Created on

Last update



Performance Curves

Split Case Pump - 250GQS-65

Revision no.


Page:
2

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Pump Model	Capacity		Head		NPSH		Shaft power		Efficiency of duty point	Rotary speed
	m ³ /h	GPM	m	Ft.	m	Ft.	kW	HP	%	RPM
250GQS-65	430-735	1893-3236	102-80	335-262	6.5	21.3	250	335	80	1780

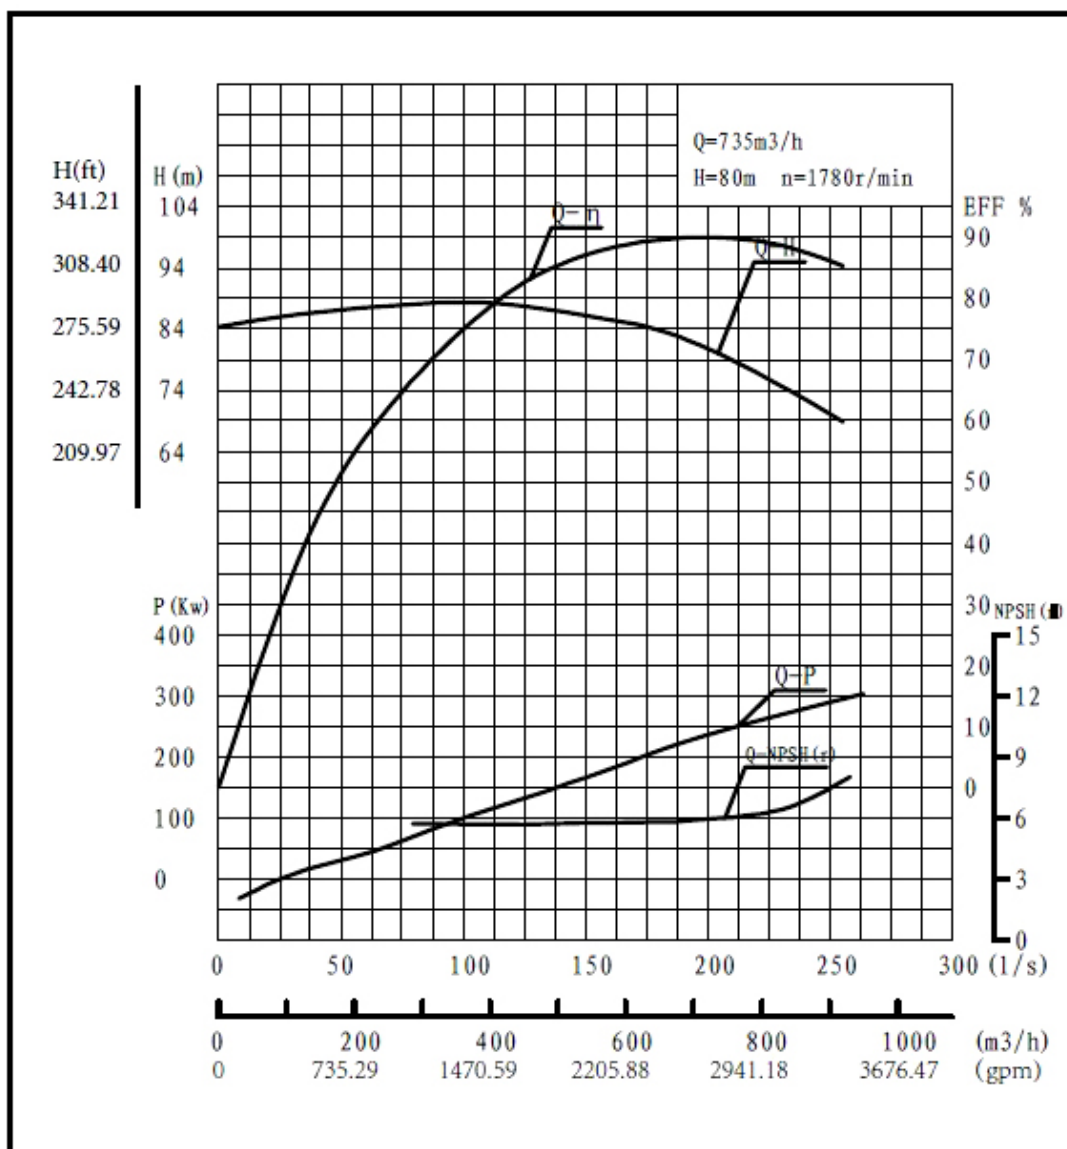

Project

Project ID

Created by

Created on

Last update



Parts and Materials

Split Case Pump - 250GQS-65

Revision no.

Page:


3

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

- **Impeller:** SS304.
- **Shaft:** SS316.
- **Sleeves:** 3Cr13.
- **Pump Casing:** HT250.
- **Other Wet End Parts:** Stainless Steel.
- **Bearing:** SKF.
- **Bolts, Screws, Studs, Nuts, Washers... etc:** EN X20Cr13 (AISI 420).

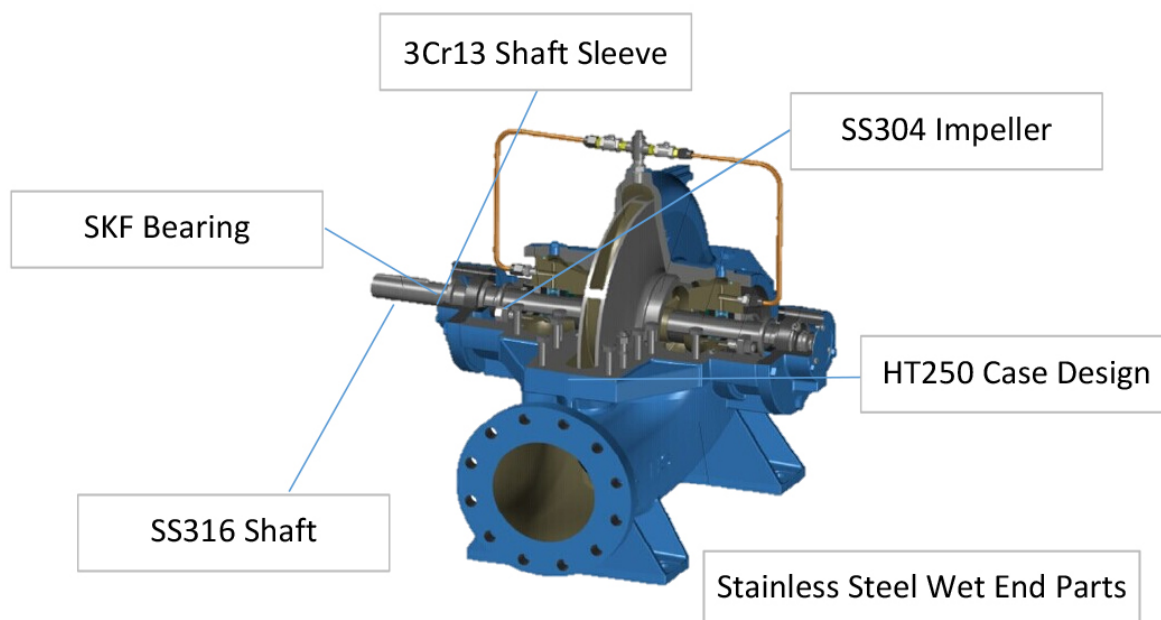

Project

Project ID

Created by

Created on

Last update