



Technical Data

Submersible Pump - GST 18-08

Revision no.

Page:

1

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address




Brand: Gol Pumps
Model: GST 18-08

Weight (lb)

Pump	Motor	Pump + Motor
6.8	25.4	32.2

Cable

Length (Ft)	AWG
3.9	14

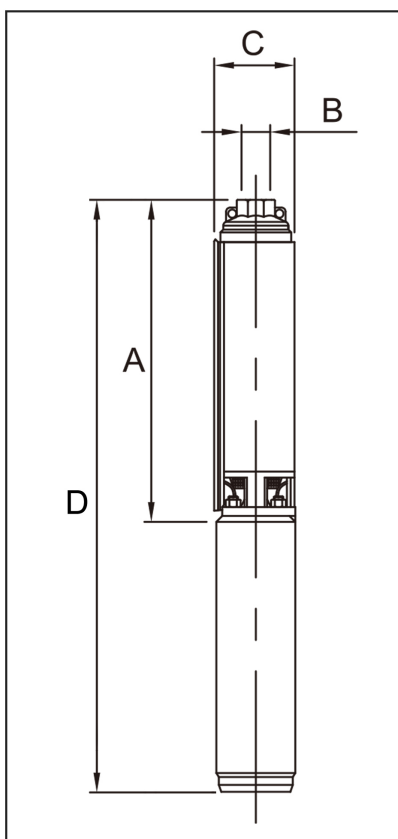Dimensions:

Outlet	Motor Dia.	Dimensions (inch)			
		A	B	C	D
NPT 1 1/4"	4"	12.7	1 1/4	3.9	27

Project

Project ID

Created by

Created on

Last update



Performance Curves

Submersible Pump - GST 18-08

Revision no.

Page:


2

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Pump Model	Motor		Q Capacity 3500RPM										
			Gal/Min	0	9.2	10.6	13.2	15.9	18.5	21.1	23.8	26.4	29.1
	kW	HP	Head in Feet	246	230	223	213	200	180	161	135	105	72
GST 18-08	0.75	1											

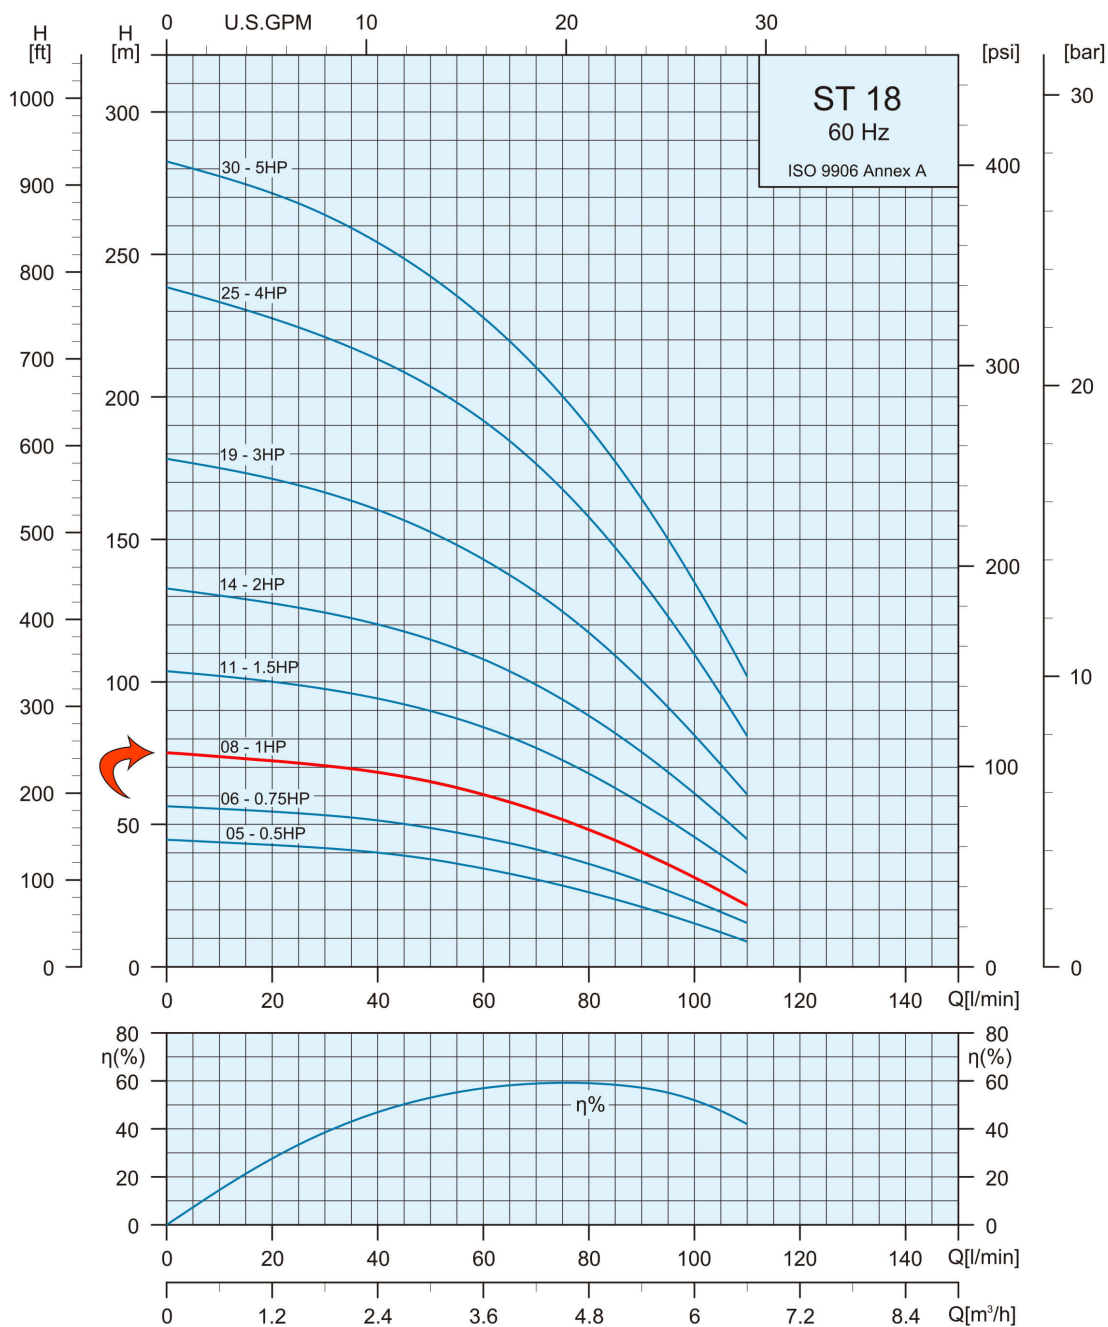

Project

Project ID

Created by

Created on

Last update



Part List and Materials

Submersible Pump - GST 18-08

Revision no.

Page:


3

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Motor Model	P2		S.F	Voltage	Phase	Wire	In	Imax	Istart	PF (%)		Efficiency (%)		RPM	Thrust	Capacitor
	kW	HP		V	PH		A	A	A	Allowable Load	Overload Factor	Allowable Load	Overload Factor		N	UF
4CS3526M	0.75	1	1.4	230	Single	2	5.4	6.8	24.2	0.97	0.98	62.7	68.2	3450	3000	25UF 450V

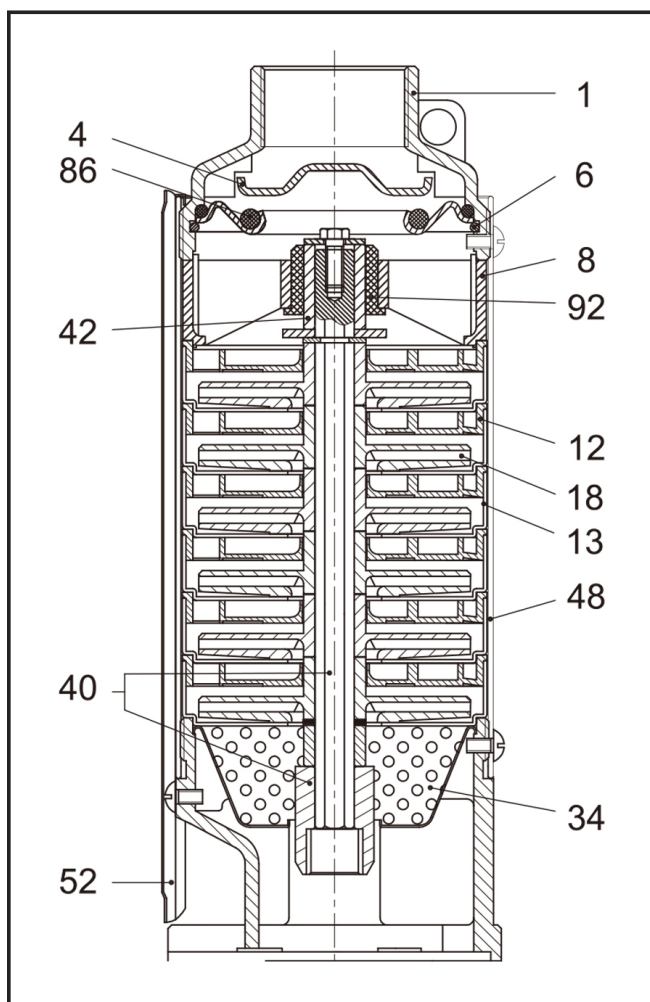

No.	Part Name	Materials
1	Discharge Head	AISI 304
4	Check Valve Cone	AISI 304
6	Check Valve Retaining Ring	AISI 304
8	Bearing Spider	Glass Filled Polycarbonate
12	Diffuser	Glass Filled Polycarbonate
13	Bowl	AISI 304
18	Impeller	Noryl
34	Strainer	AISI 304
40	Pump Shaft / Coupling	AISI 304
42	Shaft Sleeve	AISI 304 or Norly
48	Pump Casing	AISI 304
52	Cable Guard	AISI 304
86	O-Ring	NBR
92	Bearing	Polyacetal

Project

Project ID

Created by

Created on

Last update