



Technical Data

Submersible Pump - GST 07-10

Revision no.

Page:

1

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address




Brand: Gol Pumps
Model: GST 07-10

Weight (lb)

Pump	Motor	Pump + Motor
7.3	20.5	27.8

Cable

Length (Ft)	AWG
3.9	14

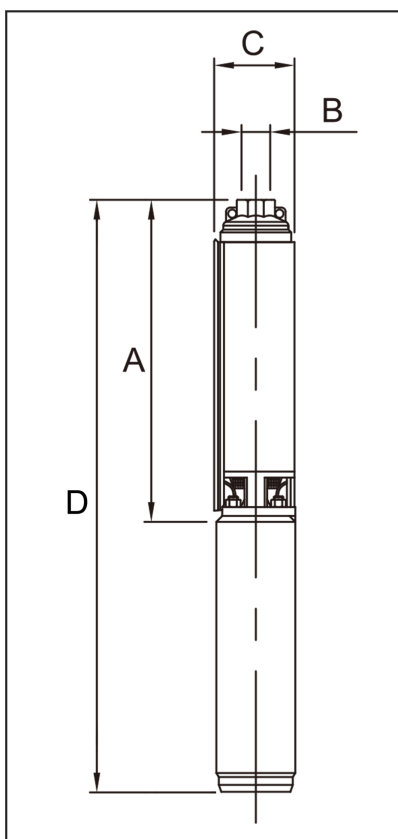Dimensions:

Outlet	Motor Dia.	Dimensions (inch)			
		A	B	C	D
NPT 1 1/4"	4"	13"	1 1/4"	3.9"	25.1"

Project

Project ID

Created by

Created on

Last update



Performance Curves

Submersible Pump - GST 07-10

Revision no.

Page:


2

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Pump Model	Motor		Q Capacity 3500RPM								
			Gal/Min	0	4	5.3	6.6	7.9	9.2	10.6	13.2
	kW	HP	Head in Feet	301.8	262.5	246.1	223.1	203.4	177.2	154.2	78.7
GST 07-10	0.37	0.5									

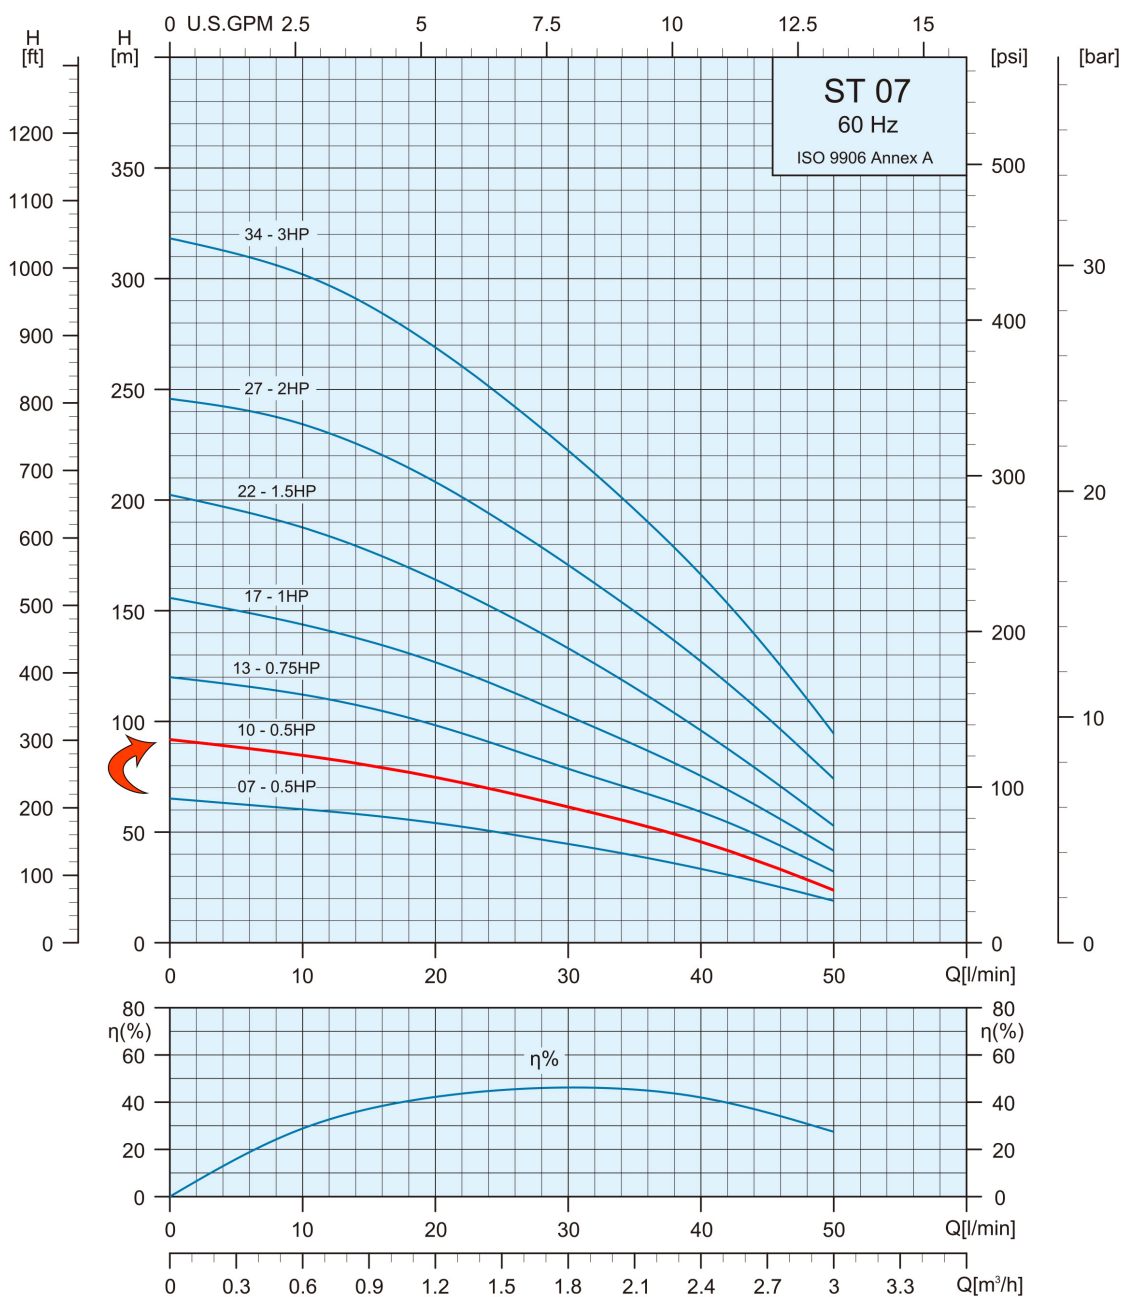

Project

Project ID

Created by

Created on

Last update



Part List and Materials

Submersible Pump - GST 07-10

Revision no.

Page:


3

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Motor Model	P2		S.F	Voltage	Phase	Wire	In	Imax	Istart	PF (%)		Efficiency (%)		RPM	Thrust	Capacitor
				V	PH		A	A	A	Allowable Load	Overload Factor	Allowable Load	Overload Factor		N	UF
	kW	HP		V	PH		A	A	A	Allowable Load	Overload Factor	Allowable Load	Overload Factor		N	UF
4CS2606M	0.37	0.5	1.6	115	Single	2	7.1	9.3	26.9	0.94	0.97	50.8	58.8	3450	2000	45UF 250V

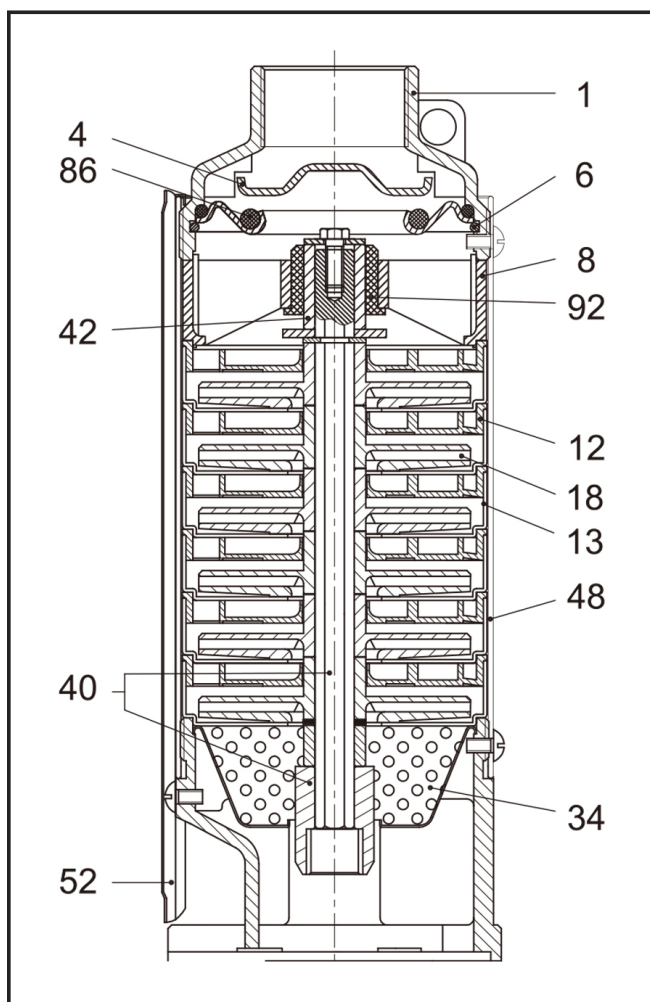

No.	Part Name	Materials
1	Discharge Head	AISI 304
4	Check Valve Cone	AISI 304
6	Check Valve Retaining Ring	AISI 304
8	Bearing Spider	Glass Filled Polycarbonate
12	Diffuser	Glass Filled Polycarbonate
13	Bowl	AISI 304
18	Impeller	Noryl
34	Strainer	AISI 304
40	Pump Shaft / Coupling	AISI 304
42	Shaft Sleeve	AISI 304 or Norly
48	Pump Casing	AISI 304
52	Cable Guard	AISI 304
86	O-Ring	NBR
92	Bearing	Polyacetal

Project

Project ID

Created by

Created on

Last update